

# Claudius Peters PACPAL

## Roto Fill

### Our advantages

- Roto Fill in state-of-the-art design
- Compact and modulare machine design with 3-16 modules
- Bag handling with highest care
- Optimized energy consumption with most innovative drive technology
- Depending on number of modules up to 6000 bags/hour



### Operational

- Suitable for free flowing powder products
- Upstream dedusting
- Availability of 63 set of weighing parameters
- Prepared for automatic bag placing
- Central operator panel, stationary beside the rotating packing machine

### Production basics

- Suitable for cement, gypsum and other building materials
- Bag types: Paper/PP/PE valve (glued and/or sewed)
- Bag weight: 10 up to 50 kg



Packing systems for  
Cement, Gypsum  
and other building  
materials

# Roto Fill

## Technical data

## Machine capacities

Number of modules	3	4	6	8	10	12	14	16
Cement 25 kg/bag [bags/h]	1125	1500	2250	3000	3750	4500	5250	6000
Cement 50 kg/bag [bags/h]	900	1200	1800	2400	3000	3600	4200	4800
Installed electric power [kW]	13,5	17,5	21,5	33,5	42,5	50,2	58,2	66,2

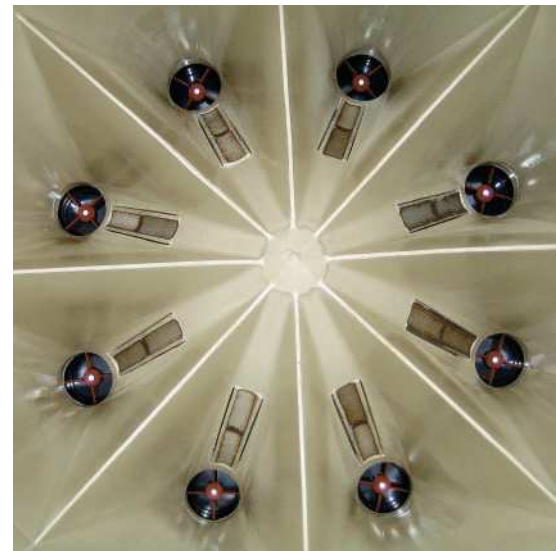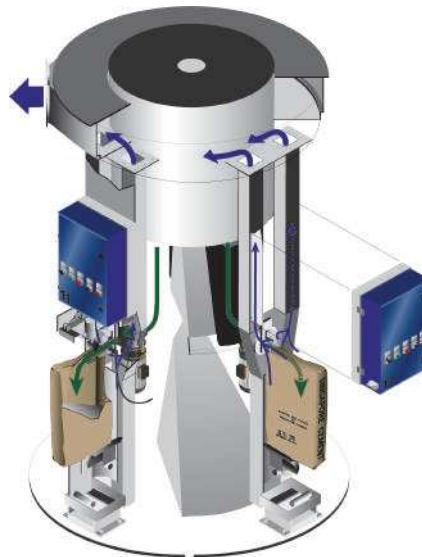

Main voltage:	380 up to 690 V 3 phase
Frequency:	50 or 60 Hz
Control voltage:	24 V DC
Motor protection class:	IP54 or higher
Pneumatic connection:	6 bar
Weighing electronic:	PACTRON

**Bulk Handling,  
Packing, Palletizing  
and Dispatch from  
one Source**



A Langley Holdings Company

### Claudius Peters Projects GmbH

Schanzenstraße 40, DE 21614 Buxtehude, Germany

T: +49 4161 706-0, E: [projects@claudiuspeters.com](mailto:projects@claudiuspeters.com)

[claudiuspeters.com](http://claudiuspeters.com)

PACPAL Roto Fill (EN) 01/2015 / Issue 2. Due to a policy of continued improvement, we reserve the right to change any specification without prior notice. ERRORS & OMISSIONS EXCEPTED.