

Claudius Peters PACPAL

Bag Applicator

Our advantages

- High performance bag applicator in state-of-the-art design
- Suitable for all brands of rotary packing machines
- Bag handling with highest care
- Valve opening in front of the filling spout
- Compact and modular design concept for various requirements
- Dust protected housing
- Optimized energy consumption with most innovative drive technology
- High performance up to 4500 bags/h



Operational



- Integrated electrical control system
- Machine operation via integrated operator panel
- Automatic bag size adjustment (optional)
- Installation of application system and bag bundle magazine on different floor levels (optional)

Production basics

- Suitable for folded valve bags
- Bag types: Paper/PP/PE
- For empty bags delivery as bundles on pallets
- Or delivered on rolls
- Optional: For special bags with valve design for sealing systems

Proven Technology to
handle efficiently
Cement and Building
Materials


Bag Applicator

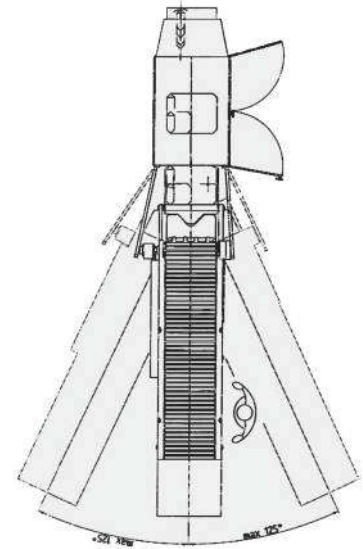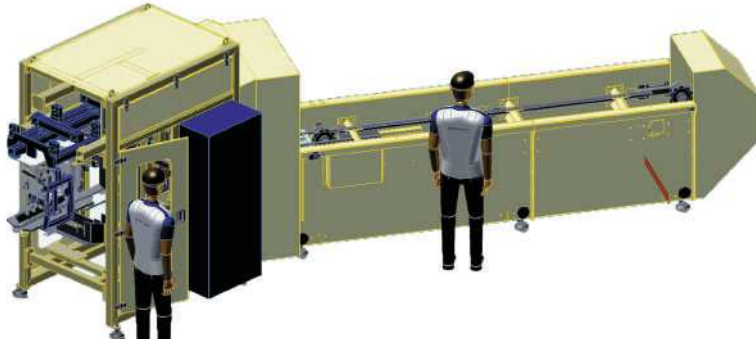

Technical data

Machine capacities

Capacity [bags/h]	2400	3000	4500
Installed electric power [kW]	3	5,2	5,2

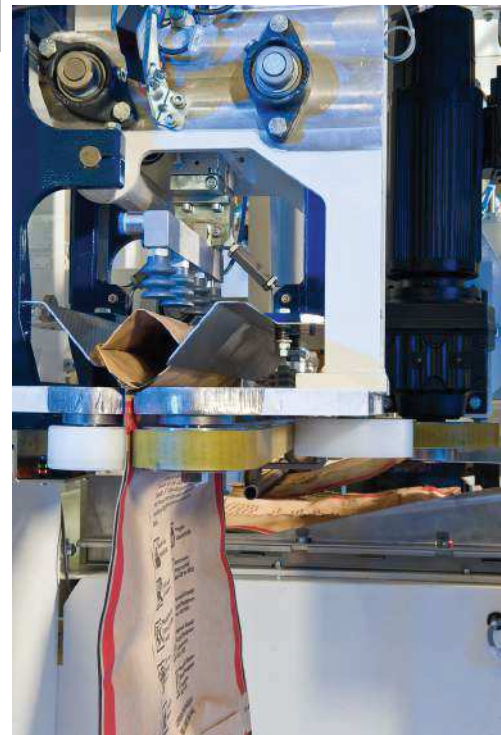

Main voltage: 380 up to 690 V 3 phase
 Frequency: 50 or 60 Hz
 Motor protection class: IP54 or higher

**Bulk Handling,
 Packing, Palletizing
 and Dispatch
 from one Source**



Claudius Peters Projects GmbH

Schanzenstraße 40, DE 21614 Buxtehude, Germany

T: +49 4161 706-0, E: projects@claudiuspeters.com

A Langley Holdings Company

claudiuspeters.com

PACPAL Bag Applicator (EN) 01 /201 5 / Issue 2. Due to a policy of continued improvement, we reserve the right to change any specification without prior notice. ERRORS & OMISSIONS EXCEPTED.S