

Claudius Peters PACPAL

Bag Loader

Our advantages

- Bag Loading machines in state-of-the-art design
- Compact and modular machine concept
- Optimized energy consumption with most innovative drive technology
- Capacity: up to 3000 bag/h



Operational




- Suitable for handling of most common bags and layer types
- Semi automatic type range to load on most common trucks and other vehicles
- Low degree of maintenance = high degree of availability
- Easy interactive operation and human machine interface (HMI)

Production basics

- Capable for cement and other building materials
- Bag weight from 25 – 50 kg
- Traveling range up to 12 m
- Bag types: Paper/PP/PE valve, FFS and others
- Individual solutions with conveying part (Bulk or Bag) upon request



Packing systems for
Cement, Gypsum
and other building
materials

Bag Loader

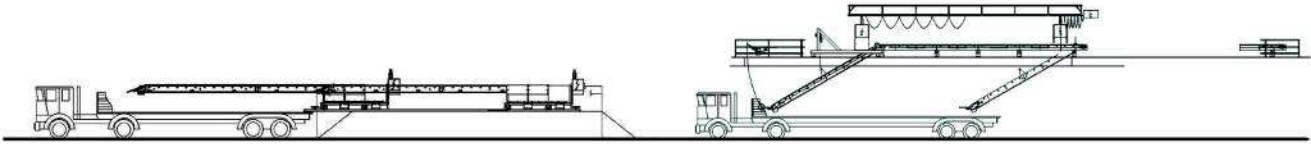

RLGC

RLTO

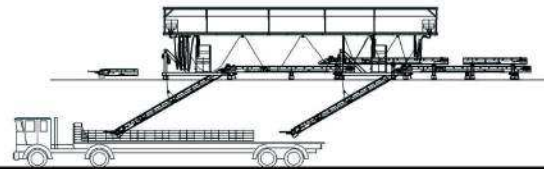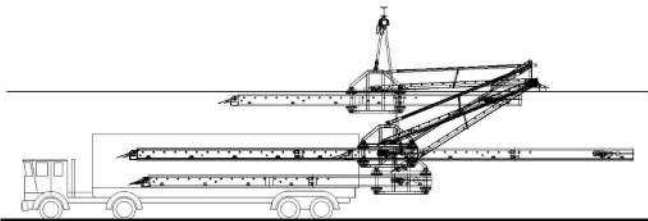

RLTC

RLTO-T

| | |
|-------------------------|--|
| Main voltage: | 380 up to 690 V 3 phase |
| Frequency: | 50 or 60 Hz |
| Control voltage: | 24 V DC |
| Power connection value: | RLGC 3,3 kW (main machine) RLTC 6,7 kW (main machine) RLTO 7,1 kW (main machine) |
| Motor protection class: | IP54 or higher |
| PLC types: | Siemens (Standard), Rockwell, Schneider, others on request |

**Bulk Handling,
Packing, Palletizing
and Dispatch from
one Source**



A Langley Holdings Company

Claudius Peters Projects GmbH

Schanzenstraße 40, DE 21614 Buxtehude, Germany

T: +49 4161 706-0, E: projects@claudiuspeters.com

claudiuspeters.com

PACPAL Bag Loader (EN) 07/2015 / Issue 1. Due to a policy of continued improvement, we reserve the right to change any specification without prior notice. ERRORS & OMISSIONS EXCEPTED.